


ATTACHMENT AT HOUSE

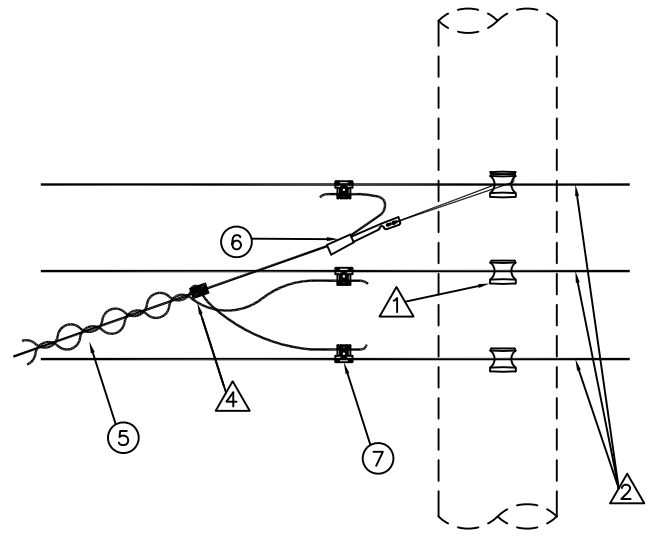

ATTACHMENT AT POLE

MATERIAL LIST

QTY.	DESCRIPTION	STOCK NO.	QTY.	DESCRIPTION	STOCK NO.
FURNISHED and INSTALLED BY CUSTOMER			FURNISHED AND INSTALLED BY CITY UTILITIES		
1. AS REQD	SERVICE ENTRANCE CONDUIT (MINIMUM 2" RIGID OR IMC. METAL CONDUIT)		4. 1	CLAMP TYPE INSULATOR	
2. AS REQD	WEATHERHEAD		5. AS REQD	SERVICE DROP CONDUCTOR SIZE AND LENGTH AS REQUIRED	
3. AS REQD	SERVICE ENTRANCE CONDUCTOR (LEAVE 30" OF WIRE EXTENDING OUT OF WEATHER HEAD) (SIZE AS REQUIRED BY CITY OR COUNTY INSPECTOR)		6. 2	SERVICE WEDGE CLAMP #4 TRIPLEX #2 TRIPLEX #1/0 & #4/0 TRIPLEX OR QUADRAPLEX	103164 103165 103166
			7. 6	P/G (CU/AL) CONNECTOR (TAPE ALL HOT CONNECTIONS) #4 & #2 TRIPLEX PG-110 #1/0 & #4/0 TRIPLEX OR QUADRAPLEX PG-120	103070 103075

- GENERAL NOTES**
- EXISTING INSULATED NEUTRAL CLEVIS.
 - EXISTING SECONDARY OR TRANSFORMER LEADS.
 - DRIP LOOP REQUIRED ON ALL SERVICES.
 - TAPE.
 - RESIDENTIAL CLEARANCE.
 - SEE SO-CLEAR FOR COMMERCIAL SERVICE CLEARANCES.

**ELECTRIC SERVICE STANDARD
CITY UTILITIES OF SPRINGFIELD MO.**

DRAWN BY: G.GUEVARA	SERVICE OVERHEAD SERVICE ATTACHMENTS		
REV BY: K.DENTON			
FILE: SO-ATT			
APPROVED: 10/29/14	REVISED: 02/23/18	SHEET OF 1 OF 1	STD. NO. SO-ATT