



**TYPICAL SEWER CROSSING
WATER MAIN OVER SEWER**

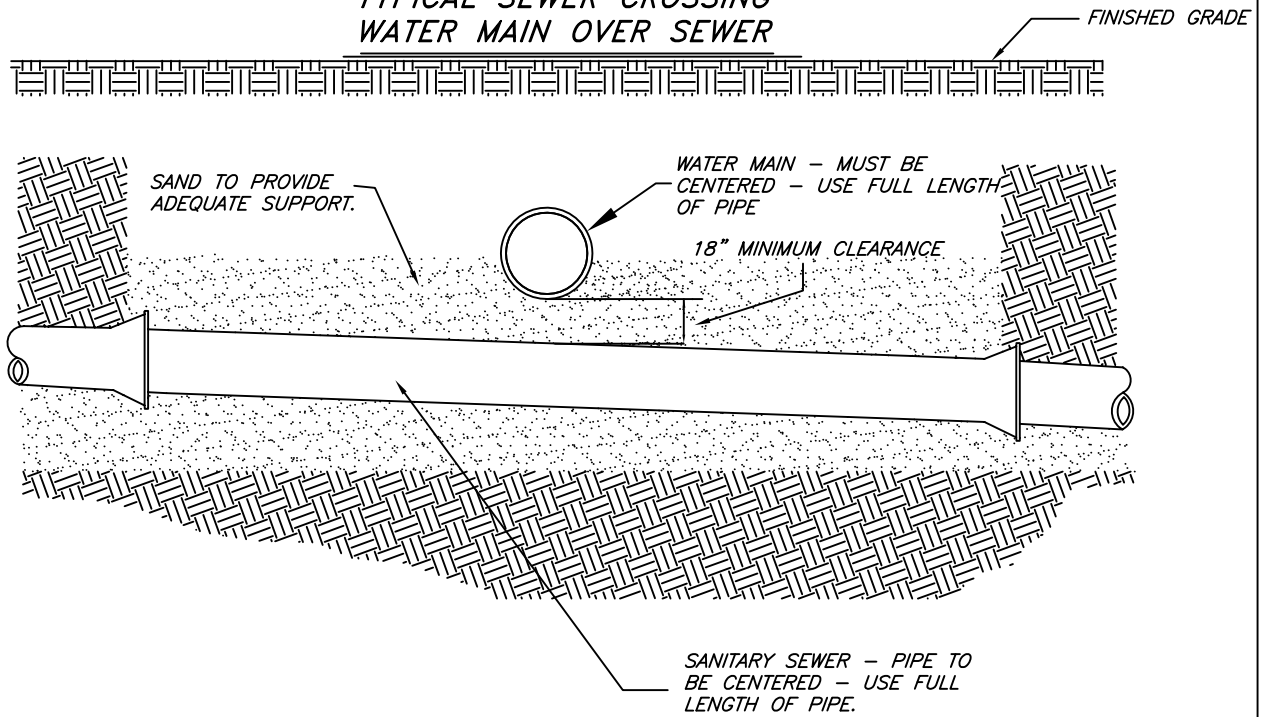

**TYPICAL SEWER CROSSING
WATER MAIN UNDER SEWER**

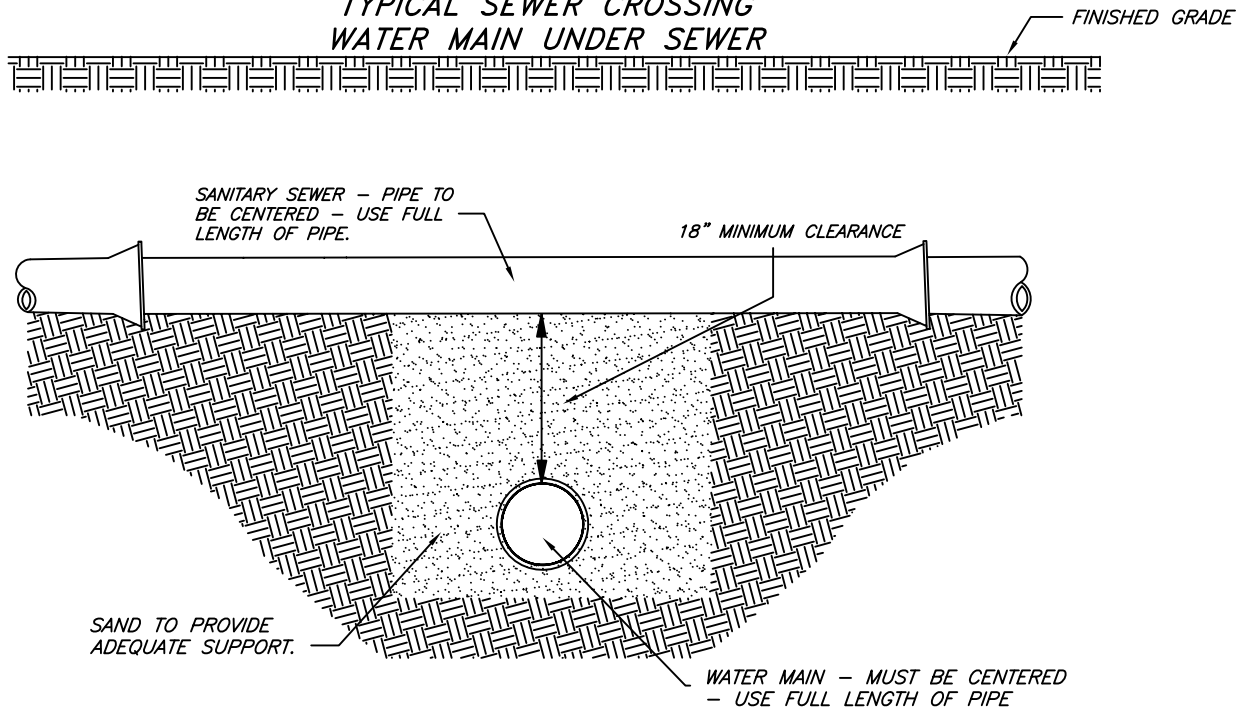

GENERAL NOTES

WATER & SEWER PIPE JOINTS SHALL BE CENTERED ON EACH OTHER. THE USE OF FULL JOINTS IS REQUIRED AT THE CROSSING.

A MINIMUM OF 4' OF COVER IS REQUIRED FROM TOP OF MAIN TO FINISHED GRADE.

**CONSTRUCTION STANDARD
CITY UTILITIES OF
SPRINGFIELD, MISSOURI**

WATER / SEWER CROSSINGS

LATEST REV. DATE: 04/24/08
STANDARD NO.: WS-105
PAGE: