


EROSION CONTROL MATTING

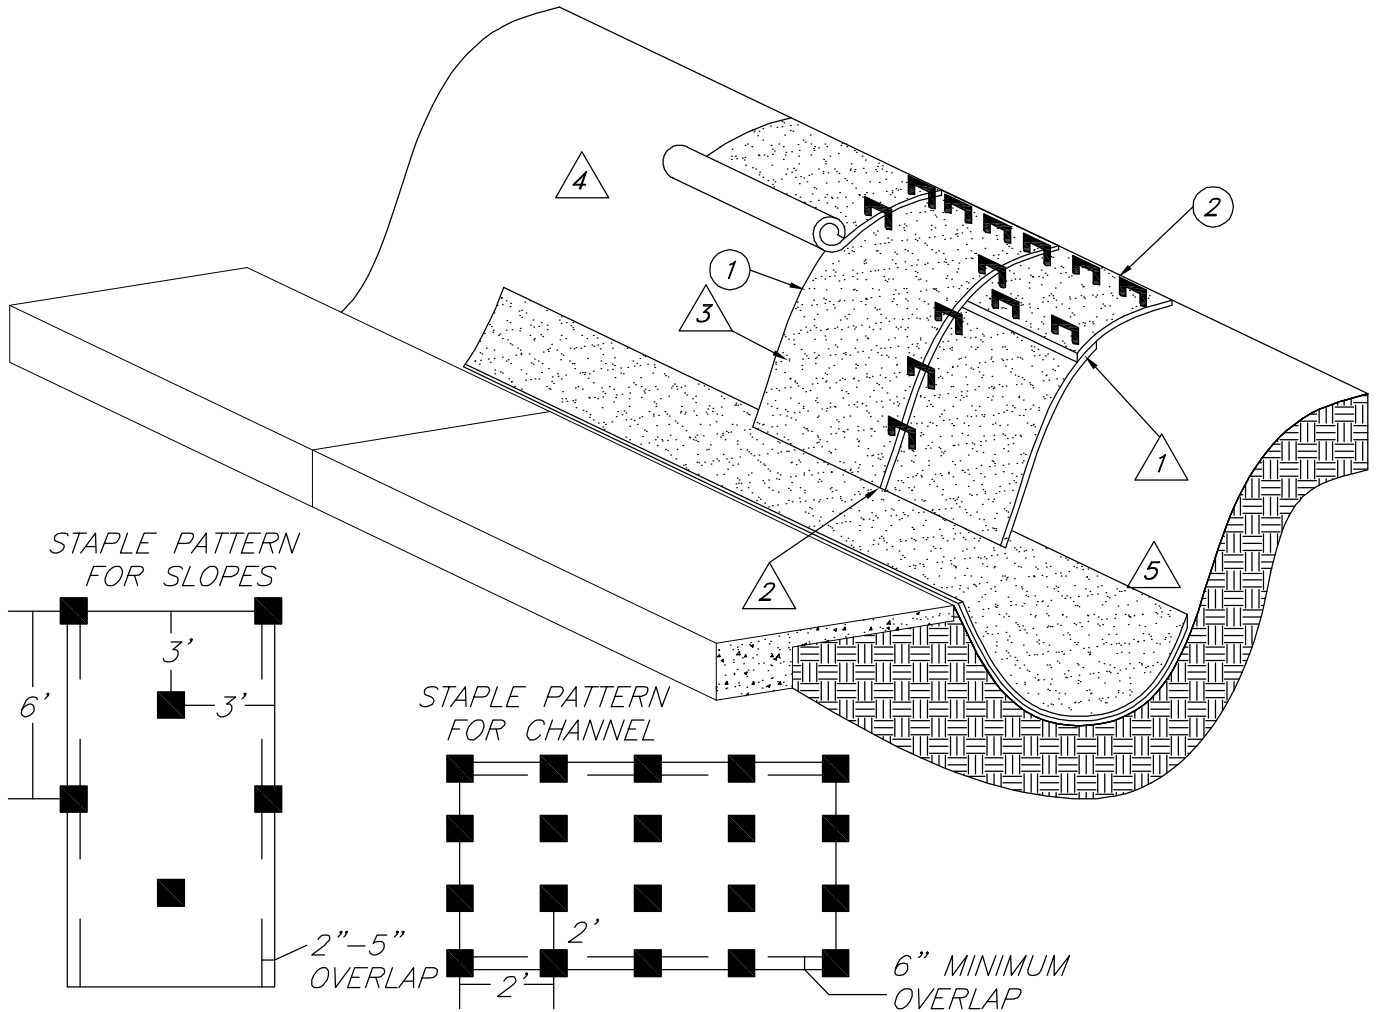

MATERIAL LIST

QTY	DESCRIPTION	STOCK NO.	QTY	DESCRIPTION	STOCK NO.
1	EROSION CONTROL MATTING	02505722			
2	STAPLES	00211495			

GENERAL NOTES	
1	IF MORE THAN ONE BLANKET IS NEEDED FOR A RUN THEN OVERLAP ADJOINING ENDS A MINIMUM OF 4" SHINGLE STYLE. STAPLE OVERLAP AREAS WITH STAGGERED PATTERN.
2	OVERLAP EDGES OR ENDS OF BLANKET A MINIMUM OF 2" WITH CONNECTING BLANKETS
3	EROSION CONTROL MATTING TO BE USED ON AREAS OF CONCENTRATED FLOW, ALL SLOPES 3:1 OR STEEPER OR ON LESSER SLOPES WHEN DEEMED NECESSARY. MATTING SHALL ALSO BE USED TO PROTECT AREAS BEING RESTORED OUTSIDE OF NORMAL GROWING SEASON.
4	INSTALL ALL MATTING IMMEDIATELY AFTER THE AREA HAS BEEN FINAL GRADED, SEEDED AND FERTILIZED.
5	ORIENT MATTING PARALLEL WITH CHANNEL FOR HEAVY FLOW ALONG CHANNEL.
6	STAPLE PATTERN SHOWN IS APPLICABLE UP TO 3:1 ANYTHING STEEPER REFER TO MANUFACTURERS SPECS.
7	REFER TO OTHER STANDARDS TO MINIMIZE FLOW.

**CONSTRUCTION STANDARD
CITY UTILITIES OF
SPRINGFIELD, MISSOURI**

**INSTALLATION OF
EROSION CONTROL MATTING**

LATEST REV. DATE 03/14/2013	STANDARD NO. ES-610	PAGE: 1
---------------------------------------	-------------------------------	-------------------